


P-1000



P-97

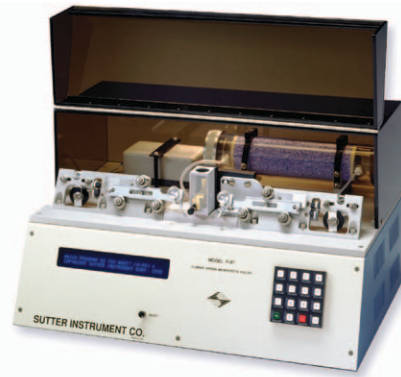

SUTTER INSTRUMENT P-1000 / P-97 Comparison

Features	P-1000	P-97	Notes
Tip Size Range	0.06µm - 3µm	0.06µm - 3µm	Two identical pipettes with the same taper length and same tip size.
Taper Length Range	3mm - 15mm	3mm - 15mm	For longer or shorter tapers, contact Sutter Technical Support.
Two Identical Pipettes	Yes	Yes	To make overall length identical, please purchase and install the optional Glass Stop (part # GS) onto your puller bar.
Program Looping	Yes	Yes	4-5 loops is ideal for thick walled glass, while 2-3 loops is ideal for thin walled glass.
Multi-line Programming	Yes	Yes	The P-1000 has an additional feature "Line Repeat" (see below).
Humidity Control Chamber	Yes	Yes	This chamber is purged with dry air before and after the pull to remove humidity and control for the ambient conditions in the lab.
100 Program Spots	Yes	Yes	Ideal for labs with multiple users.
Two Cooling Modes: Time & Delay	Yes	Yes	Delay mode is recommended when making patch pipettes with thick walled glass.
Program Lock	Yes	Yes	On the P-1000, the PROGRAM LOCK feature is on the Menu Screen of the program.
Safe Heat Mode	Yes – <i>New Feature</i>	No	The SAFE HEAT mode helps prevent filament burn-out.
Pipette Cookbook	Yes – <i>New Feature</i>	No	The PIPETTE COOKBOOK can be used to search for a program that is appropriate for the filament installed in your puller, the glass dimension you are using, and your application.
Programming Touch Screen Display	Yes – <i>New Feature</i>	No	The color TOUCH SCREEN DISPLAY provides an intuitive interface that allows more information to be displayed.
Temperature Sensor	Yes – <i>New Feature</i>	No	The JAW TEMPERATURE SENSOR helps define ideal pulling conditions.
Pre-heat Mode	Yes – <i>New Feature</i>	No	The ThermoLock™ technology in the PRE-HEAT mode assures that the jaws have reached a specific temperature before the glass is pulled. This can increase the stability of the program from pull to pull.
Copy & Paste Function	Yes – <i>New Feature</i>	No	The COPY & PASTE feature simplifies writing and editing a program.
Line Repeat	Yes – <i>New Feature</i>	No	The LINE REPEAT feature simplifies writing multi-line programs.
Ramp Test Specific to Each Program	Yes – <i>New Feature</i>	No	The RAMP TEST VALUE is linked and specific to each program.
Diagnostics	Yes – <i>New Feature</i>	No	The DIAGNOSTIC feature can be used to check the Heat, Pull, Velocity Sensor, and Air/Cooling System functions of the puller.
Error Messages & Warnings	Yes – <i>New Feature</i>	No	The P-1000 will alert the user if a system error occurs when pulling a pipette (filament burn-out, air leak, failed to melt glass, etc).
Pull Results	Yes – <i>New Feature</i>	No	The PULL RESULTS feature displays the heat-on times line by line for the last two pulls.
Glossary	Yes – <i>New Feature</i>	No	The GLOSSARY is a built-in dictionary of terms associated with the pipette puller.
PRICE¹	\$7,950	\$7,590	

1. US prices. International prices are 5% higher.



One Digital Drive • Novato • CA 94949 • Phone 415.883.0128
 Fax 415.883.0572 • Web www.sutter.com • Email info@sutter.com