


THE MCS IS ESPECIALLY DESIGNED FOR:

LARGE-SCALE, HIGH-RESOLUTION,
DEEP-TISSUE MAPPING

MULTISPECTRAL, HIGH-SPEED,
FUNCTIONAL OPTICAL IMAGING

PHOTOSTIMULATION WHILE IMAGING
THROUGH THE SAME OPTICAL PATHWAY

TWO-PHOTON MICROSCOPY AND
CONCURRENT ELECTROPHYSIOLOGY
WITH COMPUTER-CONTROLLED
PLACEMENT OF ELECTRODES BY
SUTTER MICROMANIPULATORS

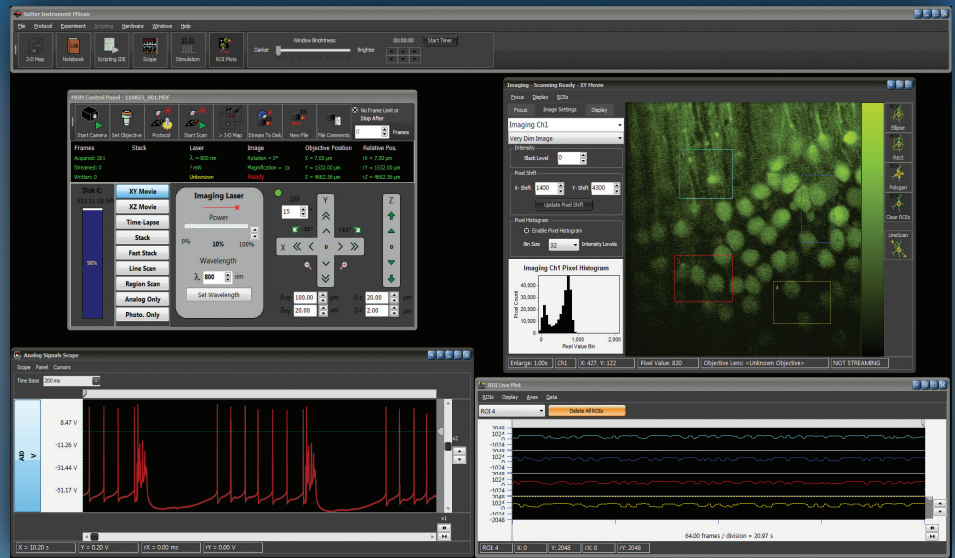

MCS: MOM[®] COMPUTER SYSTEM AND MScan 2.0 SOFTWARE

The MOM Computer System (**MCS**) is the software package **MScan 2.0**. This program has been designed to seamlessly control two-photon imaging, photostimulation and electrophysiology. While designed exclusively for use with the **MOM[®]**, it is also compatible with other 2-photon platforms. **MOM** microscope. **MCS** is designed to take on complex experiments in deep-tissue intravital imaging. Its intuitive user interface, is easy to use. The **MCS** and **MOM** together form a formidable tool to understand the most complex issues in neuroscience, immunology or oncology. Importantly, you will find in **MCS** the same standard of technical excellence that is the hallmark of all Sutter Instrument products.

The **MScan 2.0** software has been developed to simplify the many tasks inherent in a complicated imaging experiment. **MScan 2.0** is extensively multithreaded to take advantage of multicore processors. This ensures reliability and user

interface responsiveness. Furthermore, **MScan** is multiuser based to facilitate sharing of a **MOM** microscopes with **MCS** among experimenters. Experimenters can then send their data to other workstations for analysis. The **MCS** analysis program MView is available for free download on the Sutter Instrument website.

MCS includes a Windows 7 workstation, National Instruments data acquisition boards, a Firewire CCD camera and a USB controlled **MPC-200**. The National Instruments boards included are a PCI-6110 board for imaging, a PCIe-6353 board for control of imaging and photostimulation laser power and a PCIe-6321 board for electrophysiology. The package is a turnkey system as all data acquisition boards and software come installed within the workstation.

An important feature provided in **MScan 2.0** is the ability to do bidirectional frame scanning with sub-pixel line offset adjustment. Conventional two-

photon frame scanning has involved unidirectional scanning. In these scenarios, data is only recorded when sweeping in one direction across the sample. To increase the rate of data acquisition, it is then necessary to steer the laser beam back to the origin of the scan as quickly as possible to begin the subsequent line. As galvanometric scanners are most taxed and most likely to be damaged during these high-frequency movements, bidirectional scanning both increases the speed at which frames can be recorded and decreases the likelihood of damage to expensive galvanometers.

SYSTEM

MOM-MCS¹

Preinstalled MScan software, Windows 7 workstation, data acquisition boards, Firewire CCD camera

¹Must be used with MOM systems equipped with MOM-DAQ, MPC-200 and ROE-200



SUTTER INSTRUMENT

One Digital Drive • Novato • CA 94949 • Phone 415.883.0128
Fax 415.883.0572 • Web www.sutter.com • Email info@sutter.com